



Horizontal & Vertical Supply Emergency Shower Stations

- Designed for wall (horizontal) or ceiling (vertical) mounting
- SpinTec™ showerhead improves water distribution
- Activated with stainless steel pull rod and 1" IPS chrome-plated brass stay-open ball valve
- Constructed with 1" galvanized steel pipe, coated with safety-yellow Bradtech™ polyurethane to prevent corrosion
- Water supply: 1" IPS (female)
- Includes safety sign and inspection tag
- SEI certified to ANSI standard Z358.1



SA414



Model No.	Mfg. No.	Shower Head	Price /Each
HORIZONTAL SUPPLY			
SA414	S19-120	Plastic	
SAK644	S19-120A	Stainless Steel	
VERTICAL SUPPLY			
SA416	S19-130	Plastic	
SAK645	S19-130A	Stainless Steel	

Flush-Mounted Emergency Shower Stations w/ Horizontal Supply

- Integral flange mounts flush with ceiling
- Concealed pipe and fittings
- Exceed minimum water flow of 20 GPM at 30 PSI
- Universal identification sign and inspection tag included
- SEI certified to ANSI standard Z358.1

Model No. **SAR320**
Mfg. No. S19-120FM
Price/Each \$



Overhead Shower

- showerhead distributes uniform flush and consistent water pressure
- Designed for both vertical or horizontal installation allowing wall or ceiling mounting
- 3/4" IPS Schedule 40 hot-dipped galvanized steel pipe and fittings
- ANSI compliant for gallons per minute, flow rate, stream height, and water distribution
- Valve is designed so the full flow of water remains on with the simple tug of the triangular pull rod (included)



COMPLIANT™

Model No.	Shower Head	Price /Each
SFV157	Plastic	
SFV158	Stainless Steel	

Corrosion Resistant Combination Emergency Shower & Eye/Face Wash Stations

- SpinTec™ showerhead activated by a stainless steel pull rod and 1" IPS chrome-plated stay-open ball valve
- Impact-resistant plastic eyewash bowl with twin plastic spray heads
- Activated by a PVC push handle and 1/2" NPT stainless steel stay-open valve
- Fittings are all stainless steel
- 2" schedule 80 PVC pipe and floor flange withstands highly corrosive environments including chlorine
- SEI certified to ANSI standard Z358.1




SAK638



Model No.	Mfg. No.	Description	Price /Each
SAK638	S19-310PVC	Combination Shower and Eye/Face Wash	
SR377	SS3-063	Replacement Dust Caps (sold per each)	

Heat-Traced Combination Emergency Shower & Eye/Face Wash Stations

- Intended for use in areas where temperatures fall below freezing
- Heat trace cable protects unit from freezing down to -46°F
- Unit is encased in highly-visible yellow ABS removable plastic shell that resists chemicals and other harsh environmental conditions
- SpinTec™ showerhead improves water distribution shower activated by a stainless steel pull rod and 1/2" IPS chrome-plated stay-open ball valve
- Eye/face wash is activated by a large, highly visible push handle
- Twin-perforated disc eye/face wash heads with pop-off dust caps to protect spray heads from debris
- Includes universal identification sign and inspection tag
- SEI certified to ANSI standard Z358.1
- CSA certified

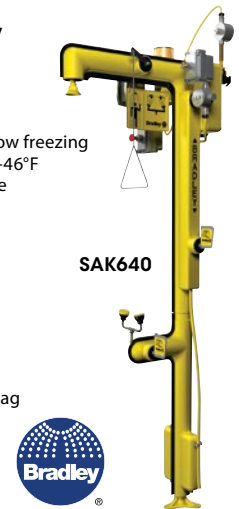

SAK640



Model No.	Mfg. No.	Description	Wt. lbs.	Price /Each
120 VOLTS				
SAK640	S19-300D2T1AEFW	Top Water Supply	110	
SAK641	S19-300D2B1AEFW	Bottom Water Supply	110	
220 VOLTS				
SAK642	S19-300D2T2AEFW	Top Water Supply	110	
SAK643	S19-300D2B2AEFW	Bottom Water Supply	110	

Heat-Traced Combination Emergency Shower & Eye/Face Wash Station

- Hydrodynamic shower design produces equal flow distribution
- Features Axion® MSR components
- 120 VAC cable-heated
- Perfect for extreme weather conditions dropping down to -34°C
- Solid stainless steel pipe stanchion and galvanized fittings offer durability and corrosive-resistance
- Universal design allows for top or bottom water supply
- Unit is pre-built and fully water/pressure tested to reduce installation time
- Certified by CSA to meet the ANSI standard Z358.1

Model No. **SEB261**
Mfg. No. 8317CTFP
Price/Each \$

