




7" x 12" Mini Metal Lathes


- Clear plastic safety guard automatically shuts lathe off when lifted
- Forward/reverse control
- Variable speed control: 0-2500 RPM
- Includes: 4" 3-jaw chuck, quick change gear box, replacement gears, 4-way tool post, MT#2 dead center, threading dial indicator, emergency stop button, chuck key and hex keys

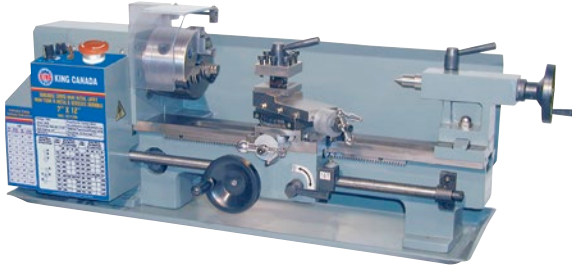

Model No.	TEB019
Mfg. No.	KC-0712ML
Distance between centers:	12"
Swing over bed:	7"
Spindle bore:	3/4"
Swing over cross slide:	4 1/2"
Taper in headstock:	MT#3
Taper in tailstock:	MT#2
Width of bedways:	3 1/4"
Total travel of cross slide:	2 3/4"
Total travel of top slide:	3"
Spindle variable speeds:	2 (0-1100 RPM, 0-2500 RPM)
Thread cutting range:	12-52 TPI
Motor:	5.5 A, 1 phase, 60 Hz
Voltage:	110 V
Dimensions:	32" L x 11 1/2" W x 13" H
Weight:	85 lbs.
Price/Each	\$

10" x 22" Belt Drive Metal Lathes


- Safety chuck guard automatically shuts lathe off when lifted
- Includes: 5" 3-jaw chuck, 6 1/2" 4-jaw chuck, replacement gears, 4-way tool post, steady rest, follow rest, 8" face plate, thread chasing dial indicator, MT#3 dead center, full length splash guard, tool box, chuck key and hex keys

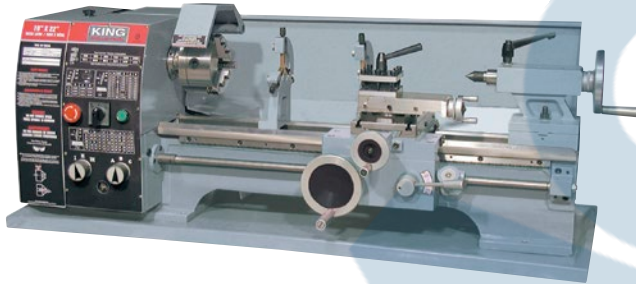

Model No.	TEB020
Mfg. No.	KC-1022ML
Distance between centers:	22"
Swing over bed:	10"
Spindle bore:	1"
Swing over cross slide:	6"
Taper in headstock:	MT#4
Taper in tailstock:	MT#3
Width of bedways:	6"
Total travel of cross slide:	6 3/8"
Total travel of top slide:	4 1/4"
Spindle speeds:	6 (150-2400 RPM)
Thread cutting range:	8-72 TPI
Motor:	1 HP, 12 A, 1 phase, 60 Hz
Voltage:	110 V
Dimensions:	50" L x 23" W x 19" H
Weight:	360 lbs.
Price/Each	\$

12" x 36" Gearhead Metal Lathes

- Safety guard automatically shuts lathe off when lifted
- Includes: 6" 3-jaw chuck, 8" 4-jaw chuck, replacement gears, quick change tool post, steady rest, follow rest, 10" DI-4 camlock face plate, thread chasing dial indicator, MT#3 dead center, MT#3 arbor taper, 1/2" drill chuck, full length splash guard, tool box, chuck keys and hex keys

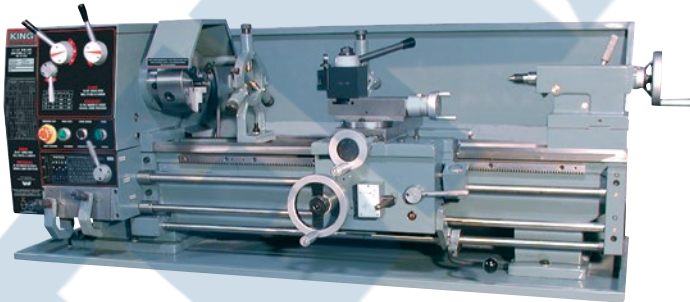

Distance between centers:	36"
Swing over bed:	12"
Swing over gap:	18"
Spindle bore:	1 1/2"
Swing over cross slide:	7 1/4"
Taper in headstock:	MT#5
Taper in tailstock:	MT#3
Width of bedways:	7 1/4"
Total travel of cross slide:	6 3/8"
Total travel of top slide:	3 3/8"
Spindle speeds:	9 (60-1500 RPM)
Thread cutting range:	4-112 TPI
Motor:	1.5 HP, 8.7 A, 1 phase, 60 Hz
Voltage:	220 V
Dimensions:	65" L x 28" W x 28" H
Weight:	710 lbs.
w/o Taper Attachments	
Model No.	TEB021
Mfg. No.	KC-1236ML
Price/Each	\$
w/Taper Attachments	
Model No.	TMA038
Mfg. No.	KC-1236ML/KM053
Price/Each	\$

Stands



Model No.
Mfg. No.
Fits:
Price/Each

TEB024
SS-1022
TEB020
\$

TEB028
SS-1236
TEB021
\$

