



## Vise Accessories

IMPROVE CLAMPING VERSATILITY & SAFETY



### WILTON MAGNEFIX VISE JAW CAPS TEMPORARY WORK-HOLDING SYSTEMS

- Designed to protect both the vise jaws and the workpiece from marring and distortion during any clamping application
- Caps are constructed from a hardened aluminum alloy with two built-in circular permanent magnets on the backside which hold the product securely to the vise
- The caps are magnetic towards the vise side to prevent steel filings from attaching themselves to the jaws and keep the clamped part from becoming magnetized

#### MODEL A - ALUMINUM MAGNEFIX JAW CAPS

- Aluminum alloy design includes six grooves to compensate for the unevenness of the workpiece
- Deeper Vee-Groove ensures more secure clamping of circular work pieces
- Use together with Rubber Magnefix Jaw Caps when clamping taper pins and spherical parts

#### MODEL F - FIBER FACE MAGNEFIX JAW CAPS

- Aluminum alloy with laminated fiber cover to prevent the absorption of outside materials
- Heat parts rapidly by concentrating heat into part
- Use on workpieces to avoid distortion and clamping marks

#### MODEL R - RUBBER FACE MAGNEFIX JAW CAPS

- Aluminum alloy with synthetic rubber cover
- Jaw cap conforms to workpiece and grips firmly without slipping while protecting work surface
- Use in combination with aluminum and prism jaw caps to clamp taper pins or tapered workpieces

#### MODEL P - PRISM MAGNEFIX JAW CAPS


- Jaw construction includes a 120° horizontal Vee-Groove, three vertical Vee-Grooves and a 90° groove for marking out and centre punching
- Ideal for light tapping and thread cutting applications



Model No.	Mfg. No.	Jaw Width"	Price /Each	Model No.	Mfg. No.	Jaw Width"	Price /Each
<b>STANDARD ALUMINUM MAGNEFIX JAW CAPS</b>							
TM832	A-4	4		TJW079	A-5.5	5 1/2	
TM833	A-4.5	4 1/2		TM835	A-6	6	
TM834	A-5	5		TJW081	A-6.5	6 1/2	
<b>FIBER FACE MAGNEFIX JAW CAPS</b>							
TM844	F-4	4		TM846	F-5	5	
TM845	F-4.5	4 1/2		TM847	F-6	6	
<b>RUBBER FACE MAGNEFIX JAW CAPS</b>							
TM856	R-4	4		TJW092	R-5.5	5 1/2	
TM857	R-4.5	4 1/2		TM859	R-6	6	
TM858	R-5	5		TJW094	R-6.5	6 1/2	
<b>PRISM MAGNEFIX JAW CAPS</b>							
TM851	P-4	4		TJW100	P-5.5	5 1/2	
TM850	P-4.5	4 1/2		TM853	P-6	6	
TM852	P-5	5		TJW102	P-6.5	6 1/2	

## Telescopic Magnetic Retrievers

- Ideal for reaching behind, underneath or around machinery and/or difficult to reach areas
- Rare earth magnet material
- Max. temperature of 180° F (82° C)

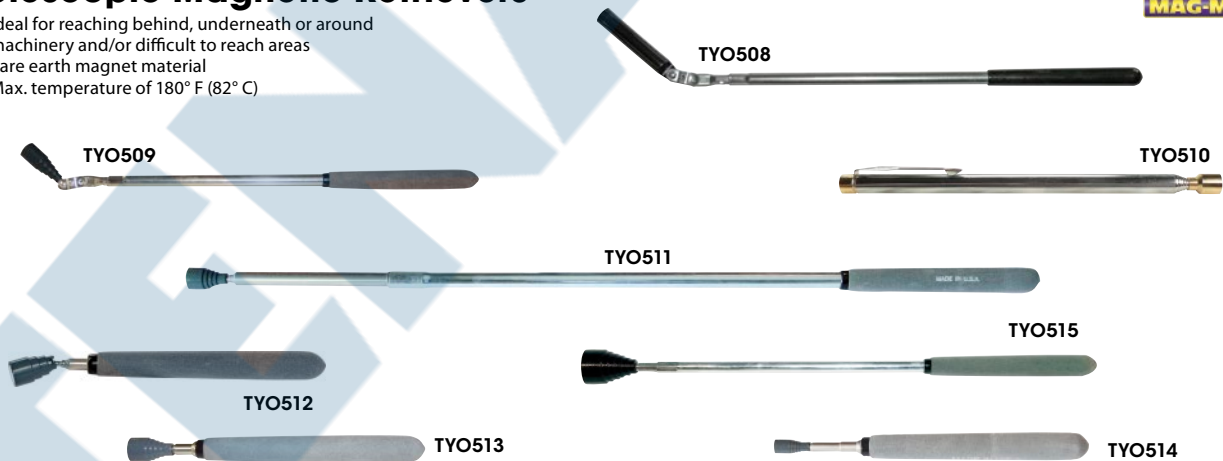

Model No.	Mfg. No.	Strength lbs.	Diameter"	Length"	Extended Length"	Weight lbs.	Price /Each
TYO508	927	7.5	1/2	17	26 1/2	0.36	
TYO509	931	12	1/2	13	26	0.44	
TYO510	240N	2	5/16	5 1/2	25 1/2	0.07	
TYO511	926	14	5/8	23 1/2	50	0.42	
TYO512	925	7	5/8	8	35	0.19	
TYO513	923	5	3/8	6 1/2	32	0.14	
TYO514	924	7	5/8	6 1/2	32	0.18	
TYO515	990SM	20	1 1/8	16 1/2	29	0.65	