



10' Steel & Aluminum Conveyors

STEEL CONVEYOR, 1 3/8" ROLLERS

- Sturdy and economical, these units have 1 3/8" diameter x 18-gauge steel rollers installed on a 2 1/2" x 1 1/2" formed 12-gauge steel frame
- Frame has 5/16" hexagonal holes punched at 1 1/2" centers to permit roller spacing as close as 3" center to center
- Each roller has a nominal capacity of 70 lbs.
- Frames are rated at 350 lbs. with supports at 10' centers
- Place supports at 5' centers and the capacity is increased to 700 lbs.
- Standard BFR widths available from 9" to 30"
- Other centre to centre distances also available
- **F.O.B. Chateaugay, Quebec**

Model No.	BFR Width"	Centre to Centre"	Wt. lbs.	Price /Each
-----------	------------	-------------------	----------	-------------

STEEL CONVEYORS - 1 3/8" ROLLERS

MA144	15	2	115
MA145		3	88
MA146		4	75
MA147		6	62
MA148	18	2	143
MA149		3	108
MA150		4	90
MA151	6	73	
MA156	24	2	175
MA157		3	130
MA158		4	107
MA159		6	84

STEEL CONVEYORS - 1 7/8" ROLLERS

MA165	18	3	195
MA166		4 1/2	155
MA167		6	132
MA169	21	3	216
MA170		4 1/2	169
MA171	6	144	
MA173	24	3	242
MA174		4 1/2	185
MA175		6	156

STEEL CONVEYOR, 1 7/8" ROLLERS

- These heavy-duty rollers are 1 7/8" diameter x 16-gauge installed on a 3 1/2" x 1 1/2" formed 10-gauge steel frame
- Frame has 7/16" hexagonal holes punched at 1 1/2" centers to permit roller spacing as close as 3" center to center
- Each roller has a nominal capacity of 200 lbs.
- Frames are rated at 900 lbs. with supports at 10' centers
- Place supports at 5' centers and increase capacity to 1800 lbs.
- Special BFR widths available from 9" to 48"
- Other centre to centre distances also available
- **F.O.B. Chateaugay, Quebec**


Model No.	BFR Width"	Centre to Centre"	Wt. lbs.	Price /Each
-----------	------------	-------------------	----------	-------------

ALUMINUM CONVEYORS - 1 1/2" ROLLERS

MA019	15	2	62
MA020		3	46
MA021		4	38
MA022		6	30
MA023	18	2	74
MA024		3	54
MA025		4	44
MA026	6	34	
MA031	24	2	90
MA032		3	64
MA033		4	52
MA034		6	40

ALUMINUM CONVEYOR, 1 1/2" ROLLERS


- Lightweight and durable, these models are perfect for portable applications
- Aluminum rollers are 1 1/2" diameter x 16-gauge; installed on a 2 1/2" x 1 1/2" extruded aluminium frame
- Frame has 5/16" hexagonal holes punched at 1 1/2" centers to permit roller spacing as close as 3" center to center
- Each roller has a nominal capacity of 70 lbs.
- Frames are rated at 250 lbs. with supports at 10' center
- Place supports at 5' centers and increase the capacity to 500 lbs.
- Standard BFR widths available from 9" to 24"
- Other centre to centre distances also available
- **F.O.B. Chateaugay, Quebec**

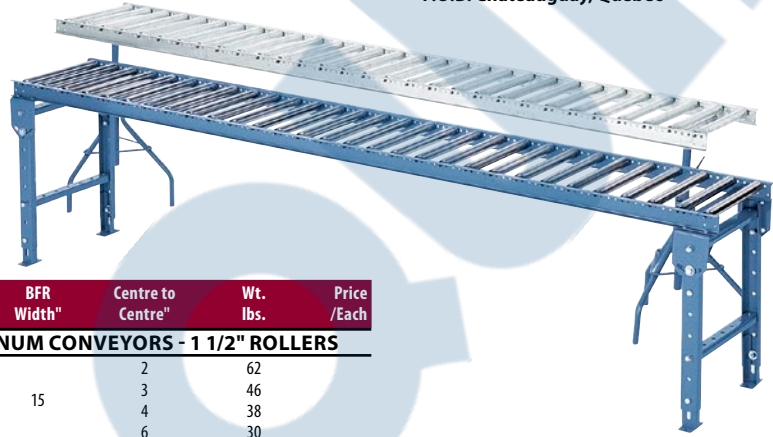

BFR = Between Frame Rails
Note: Also available in stainless steel. Conveyor support frames and/or tripods are sold separately.

90° Curved Sections

- 90° curved conveyors with a 30" inside radius
- Straight 1 1/2" rollers, 2 1/2" channel
- **F.O.B. Chateaugay, Quebec**

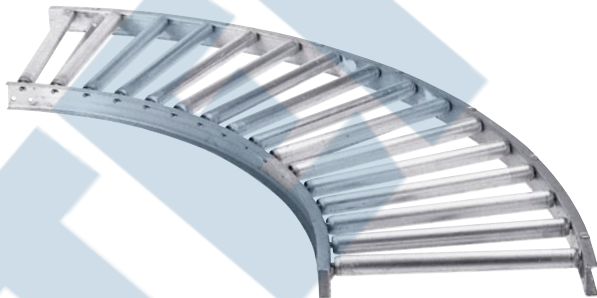

Centre to Centre"	Model No.	Price /Each	Model No.	Price /Each	Model No.	Price /Each
STEEL	15" BFR		18" BFR		24" BFR	
2	-	Price on Application	MA101	Price on Application	MA104	Price on Application
3	MA098		MA102		MA105	
ALUMINUM	15" BFR		18" BFR		24" BFR	
2	MA082	Price on Application	MA086	Price on Application	MA089	Price on Application
3	MA083		MA087		MA090	

Conveyor Supports

H-FRAMES

Used in permanent support installations. Specify for use with a 2 1/2" or 3 1/2" frame conveyor.

F.O.B. Chateaugay, Quebec

Model No.	BFR Width"	Adjustable Height"	Wt. lbs.	Price /Each
MA128	15	24 - 36	28	
MA129	15	35 - 48	28	
MA130	18	24 - 36	28	
MA131	18	35 - 48	30	
MA132	21	24 - 36	28	
MA133	21	35 - 48	30	
MA134	24	24 - 36	28	
MA135	24	35 - 48	30	

BFR = Between Frame Rails

TRIPODS

Used in portable applications. The tripod will fit up to a 21" BFR. Specify if used on a 24" BFR conveyor, modification required.

Model No.	Adjustable Height"	Wt. lbs.	Price /Each
MD340	12 - 18	11	
MA111	18 - 28	12	
MA108	24 - 40	13	
MA109	30 - 52	15	

