



## Rolling Step Ladders

- Ideal wherever there is a need to reach bulky materials
- Rolls easily into position and locks firmly to the floor for maximum safety
- 2 to 6 step ladders operate on spring-loaded casters
- Casters retract under operator's weight, rubber feet drop down
- First step on all 8 to 16 step ladders activates the floor locking mechanism (step off and kick release to make the ladder mobile)
- Non-clogging slip-resistant steel steps
- Frame is rugged welded 1" round steel tubing
- 8 to 16 step ladders shipped knocked down, easily assembled
- Capacity: 300 lbs.
- Durable Kleton blue enamel finish
- CSA certified to the ANSI A14.7 standard



**Note:**  
Ladders are not to be used as work platforms.




MA617



MA613



MA615

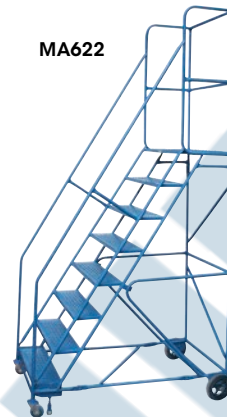

MA622



MA624

### WITH HANDRAILS

Model No.	Number of Steps	Step Size W" x D"	Top Step Height"	Top Step W" x D"	Base Dimensions W" x D"	Wt. lbs.	Price /Each
<b>SPRING LOADED CASTERS</b>							
MA614	4	22 x 8	37	22 x 16	30 x 36	78	
MA616	5	22 x 8	46	22 x 16	30 x 46	89	
MA617	6	22 x 8	55	22 x 16	30 x 51	100	

### NARROW WIDTH, SPRING LOADED CASTERS

VD441	4	18 x 8	37	18 x 16	26 x 36	73	
VD442	5	10 x 8	46	18 x 16	26 x 46	82	
VD443	6	18 x 8	55	18 x 16	26 x 51	92	

### LOCKING STEP

MA622*	8	30 x 8	72	30 x 16	38 x 60	180	
MA623*	10	30 x 8	89	30 x 16	38 x 72	230	
MA624*	12	30 x 8	109	30 x 16	38 x 80	250	
MA625*	14	30 x 8	128	30 x 16	38 x 93	275	
MA626*	16	30 x 8	144	30 x 16	38 x 104	305	

\* Ships knocked down easy assembly

### WITHOUT HANDRAILS

Model No.	Number of Steps	Step Size W" x D"	Top Step Height"	Top Step W" x D"	Base Dimensions W" x D"	Wt. lbs.	Price /Each
MA612	2	22 x 8	19	22 x 16	24 x 26	32	
MA613	3	22 x 8	28	22 x 16	24 x 30	42	
MH279	4	22 x 8	37	22 x 16	24 x 37	52	
MA615	5	22 x 8	46	22 x 16	24 x 41	61	

## Aluminum Rolling Ladders

- Widely used in hospitals, banks, offices, pharmaceutical and food processing applications
- Corrosion resistant, easy to clean and non-magnetic
- 3/4" schedule 40, 1-1/16" O.D. pipe
- 7" deep steps
- 14" deep top step
- Slip-resistant ribbed tread style steps, a more aggressive serrated is available upon request for all sizes
- Spring-loaded casters included on 2-7 step models only
- Step lock included on 8-12 step models only
- Capacity: 350 lbs.
- All-welded with unpainted aluminum mill finish
- Complies with OSHA and ANSI standards



VC486



Number of Steps	Top Step Height"	Overall Height"	16" W Step Model No.	Base W" x D"	Price /Each	24" W Step Model No.	Base W" x D"	Price /Each
<b>WITHOUT HANDRAILS</b>								
1	10	10	VC470	16 x 14		VC471	24 x 14	
2	20	20	VC472	19 x 24		VC473	28 x 24	
3	30	30	VC474	21 x 30		VC475	28 x 30	
4	40	40	VC476	21 x 36		VC477	29 x 36	
<b>WITH HANDRAILS</b>								
2	20	52	VC478	19 x 24		VC479	28 x 24	
3	30	62	VC480	21 x 31		VC481	29 x 31	
4	40	72	VC482	21 x 37		VC483	30 x 37	
5	50	82	VC484	21 x 44		VC485	30 x 44	
6	60	92	VC486	26 x 51		VC487	32 x 51	
7	70	102	VC488	26 x 57		VC489	32 x 57	
8	80	112	-	-		VC490	33 x 60	
9	90	122	-	-		VC491	33 x 67	
10	100	132	-	-		VC492	33 x 73	
11	110	142	-	-		VC493	33 x 80	
12	120	158	-	-		VC494	33 x 86	

\*Also available in other sizes and tread styles